

## Disposal Description

- Part of Moen Disposal Host Series: for advanced cleanup power. Built for powerful performance and reliable functionality.
- 3/4 Horsepower VORTEX™ Motor has powerful grinding capabilities to eliminate tough kitchen scraps
- VORTEX™ Motor features permanent magnet motor technology designed to help reduce jamming
- Universal Xpress Mount™ fits all Moen and most existing 3-bolt mounting assemblies
- Pre-installed power cord - a savings over models where cord must be purchased separately, cord easily removes for optional hardwiring
- SoundSHIELD™ sound deadening insulation
- Compact design frees up space under the sink
- Continuous feed with stainless steel grind components
- Manual Reset Button
- Garbage disposals reduce waste sent to landfills making it an eco-friendly option for your home

## Included Components

- GX75c Disposal Unit with Universal Xpress Mount™
- Pre-installed Power Cord, Hardwire Capable
- Removable Splash Guard
- Polished Stainless Steel Sink Flange and Drain Stopper
- Drain Elbow and Mounting Assembly

## Warranty & Assurance


- 10 year limited warranty with in-home service
- Safe for use with properly sized septic systems



Model: GX75c



## Critical Dimensions

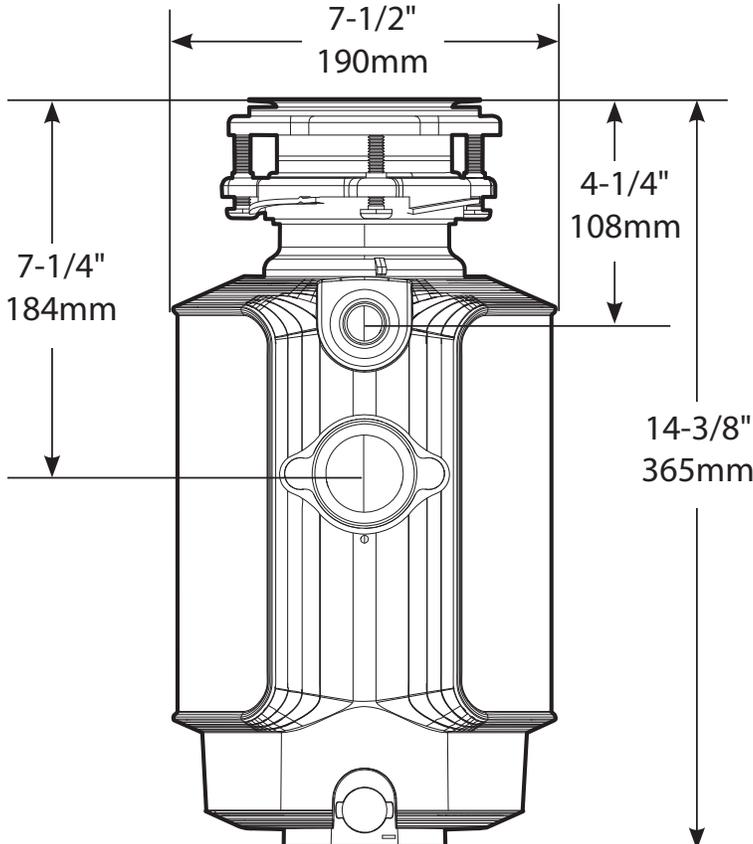

| Specification Detail         |  |
|------------------------------|--|
| Horsepower                   | 3/4 HP   |
| Feed Type                    | Continuous                                       |
| On/Off Controls              | Wall Switch                                      |
| Motor Type                   | Permanent Magnet Motor                           |
| RPM (Revolutions Per Minute) | 2700   |
| Weight                       | 12 lbs. / 5.5 kg                                 |
| Volts                        | 115  |
| Hz/Amps                      | 60/6.0   |
| Drain Connection Size        | 1 1/2" / 38mm                                    |
| Dishwasher Connection Size   | 7/8" / 22mm                                      |
| Maximum Sink Thickness       | 1/2" / 13mm                                      |
| Sink Drain Flange Finish     | Polished Stainless Steel                         |
| Grind Component Material     | Stainless Steel                                  |
| Grind Chamber Material       | Corrosion Proof Glass Filled Polyester and Nylon |