MOEN[®]

There is more than one version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

- · Versatile, hands-free convenience in the kitchen
- Power Clean[™] spray technology
- · Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Pulldown spray with 68" braided hose
- Control box flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pulldown or retracted position
- · Spout rotates 100 degrees

FLOW

• Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


1255™ Duralast™ cartridge

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- · Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY


- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

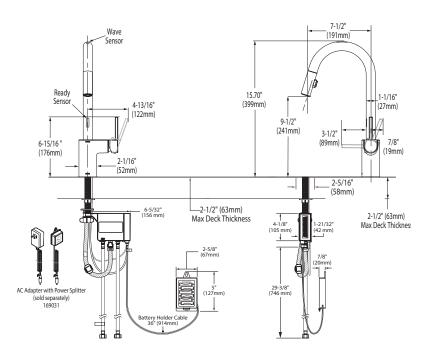

CRITICAL DIMENSIONS

(DO NOT SCALE)

Specifications



Align with MotionSense™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565E series


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

(OPTIONAL 3-HOLE ESCUTCHEON 141002 SERIES AVAILABLE)






Close up view of Control Box



Battery Holder



MOEN[®]

FAUCET DESCRIPTION

- · Versatile, hands-free convenience in the kitchen
- Power Clean[™] spray technology
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Pulldown spray with 68" braided hose
- Control box flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


1255™ Duralast™ cartridge

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY


- · Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

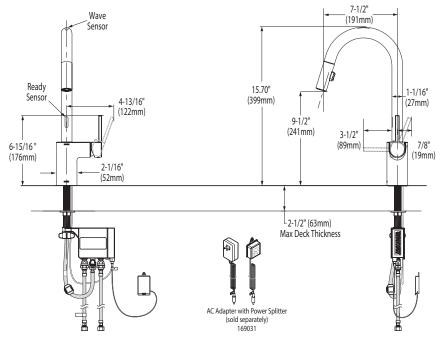

CRITICAL DIMENSIONS

(DO NOT SCALE)

Specifications



Align with MotionSense™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565E series


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

(OPTIONAL 3-HOLE ESCUTCHEON 141002 SERIES AVAILABLE)






Close up view of Control Box



Battery Holder



MOEN[®]

FAUCET DESCRIPTION

- · Versatile, hands-free convenience in the kitchen
- Power Clean™ spray technology
- · Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Pulldown spray with 68" braided hose
- Control box flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- · Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- · Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

7-1/2 Wave (191mm) Sensor Ready 15.70" 1-1/16 Sensor (399mm) 4-13/16" (27mm) (122mm) 9-1/2" (241mm) 3-1/2" 7/8" 6-15/16" (19mm) (176mm) (52mm) ^L2-1/2" (63mm) Max Deck Thickness AC Adapter with Power Splitter (sold separately) 169031

Specifications



Align with MotionSense™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565E series


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

(OPTIONAL 3-HOLE ESCUTCHEON 141002 SERIES AVAILABLE)






Close up view of Control Box



Battery Holder



CRITICAL DIMENSIONS

(DO NOT SCALE)