There is more than one version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Boost™ Technology provides boosted water performance with the push of a button
- Metal construction with various finishes identified by suffix
- Duralock™ Ouick connect
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


1255™ Duralast™ cartridge
STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow




WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation



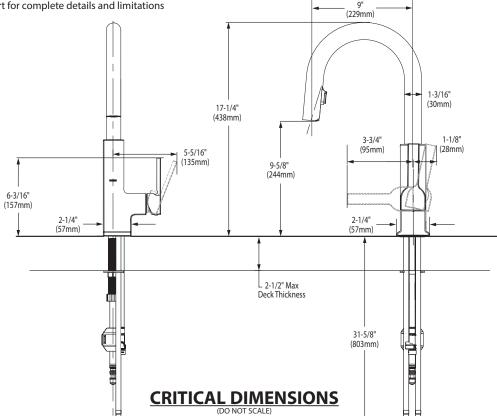





STō **Single Handle High Arc Pulldown Kitchen Faucet**

Models: S72308 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.



FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

MOEN[®]

Specifications

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Boost™ Technology provides boosted water performance with the push of a button
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA (5 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations




STō **Single Handle High Arc Pulldown Kitchen Faucet**

Models: S72308 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.



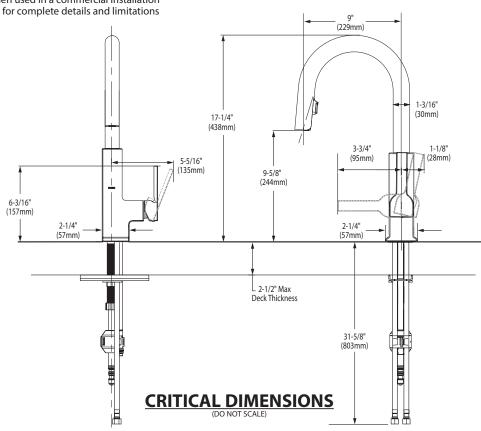

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com